
PNM METER STANDARD





Allowable Uses

- Permanent 240V Overhead and Customer Owned Underground.
- Temporary Overhead and Temporary Underground Service.
- Permanent 240V Underground PNM Service <100' Maximum or Less than (4/0 Underground Cable, NOT Approved for 350 Underground Cable)

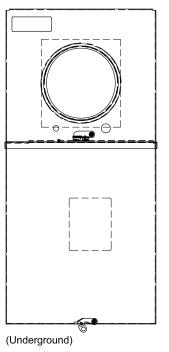

NOTES

- (1) Socket to be Underwriters Laboratory (UL) listed.
- (2) Connections for terminating service conductors shall be the lay-in type.
- (3) Service conduit to enter at point "A"
- (4) Permanent 240V overhead, customer owned underground, permanent 240V underground PNM Service <100' Maximum or less than (4/0 underground cable), or overhead and underground temporary service only.
- (5) Meter shall be 4' 5' 6" from finished grade.
- (6) Commercial application for non-critical loads, i.e. sprinkler control and gates. PNM will allow socket without bypass handle.
- (7) PNM does not permit a trough ahead of meter socket.
- (8) Metering and instrument cabinets shall not be used to house Customer-owned equipment, such as distribution panels or other equipment, nor used as a junction box/trough for the distribution of circuits
- (9) Customer building numbers must be permanently painted on proper meter panels.

REFERENCES

- (1) See DS-4-6.0 120/240V Underground Temporary Service Pole
- (2) See DS-4-8.0 Overhead Permanent/Temporary Single-Phase or Temporary Three-Phase Service Pole
- (3) See DS-4-9.0 Underground Residential Customer-Owned Service
- (4) See DM-4-11.0 Maximum Available Fault Current
- (5) See MS-3-7.0 Over 320A 240V Single-Phase Meter Options

| Approved Equipment | | | |
|--------------------|--|--|--|
| L | Manufacturer | Item | Mfg Part# |
| | Eaton Eaton ** Milbank Milbank Siemens Siemens Square D Square D Square D Square D | 200A OH/UG Ringless w/Gasket 200A OH/UG Ringless 200A OH/UG Ringless 4T Socket 200A OH/UG Ringless 20T Socket 200A OH/UG Ringless 16T Socket 200A OH/UG Ringless 16T Socket 200A OH/UG Ringless 20T Socket 200A OH/UG Ringless 20T Socket 200A OH/UG Ringless 8T Socket 200A OH/UG Ringless 8T Socket | MB(***)w/ Gasket MB2040PV200BTS U5168-XTL-200 U5268-XTL-200 MC0816B1200RCT MC2040B1200R RC2040M200S RC2040M200S RC816F200SS QC2442M200S |

For ease of checking service without interruption, PNM will no longer allow ring meter sockets as of 12/01/2013.

- ** 225A buss makes solar tie ready, eliminating the need for supply side connection.
- *** There a various catalog # available when gasket is included.

240V 200A Single-Phase Combo Meter Socket

MS-2-9.0